

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets

**BEST AVAILABLE COPY**

(11) Publication number:

0 221 570

A2

(12)

**EUROPEAN PATENT APPLICATION**

(21) Application number: 86115473.0

(51) Int. Cl.<sup>4</sup>: A61F 2/04


(22) Date of filing: 07.11.86

(30) Priority: 07.11.85 US 796009

(43) Date of publication of application:  
13.05.87 Bulletin 87/20(84) Designated Contracting States:  
AT BE CH DE ES FR GB GR IT LI LU NL SE(71) Applicant: Palmaz, Julio C.  
12610 Stonehenge  
San Antonio Texas 78230(US)(72) Inventor: Palmaz, Julio C.  
12610 Stonehenge  
San Antonio Texas 78230(US)(74) Representative: Patentanwälte Grünecker, Dr.  
Kinkeldey, Dr. Stockmair, Dr. Schumann,  
Jakob, Dr. Bezold, Meister, Hilgers, Dr.  
Meyer-Plath  
Maximilianstrasse 58  
D-8000 München 22(DE)

(54) Expandable intraluminal graft, and apparatus for implanting an expandable intraluminal graft.

(57) An expandable intraluminal vascular graft is expanded within a blood vessel by an angioplasty balloon associated with a catheter to dilate and expand the lumen of a blood vessel. The graft may be a wire mesh tube or a thin-walled tubular member having a plurality of openings formed therein.

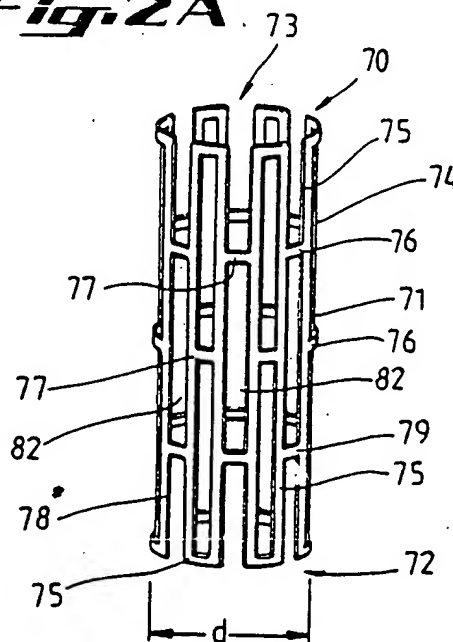**Fig. 2A**

EP 0 221 570 A2

Received & Processed  
SCIENTIFIC LIBRARY  
RECEIPTS & RECORDS

JUL 0 1 1987

PAT. &amp; T.M. OFFICE

PATENT  
SUBJECT \_\_\_\_\_  
MASTER COPY

# EXPANDABLE INTRALUMINAL GRAFT, AND APPARATUS FOR IMPLANTING AN EXPANDABLE INTRALUMINAL GRAFT

## 1. Field of the Invention.

The invention relates to an expandable intraluminal graft for use within a body passageway or duct and, more particularly, expandable intraluminal vascular grafts which are particularly useful for repairing blood vessels narrowed or occluded by disease; and a method and apparatus for implanting expandable intraluminal grafts.

## 2. Description of the Prior Art.

Intraluminal endovascular grafting has been demonstrated by experimentation to present a possible alternative to conventional vascular surgery. Intraluminal endovascular grafting involves the percutaneous insertion into a blood vessel of a tubular prosthetic graft and its delivery via a catheter to the desired location within the vascular system. Advantages of this method over conventional vascular surgery include obviating the need for surgically exposing, incising, removing, replacing, or bypassing the defective blood vessel.

Structures which have previously been used as intraluminal vascular grafts have included coiled stainless steel springs; helically wound coil springs manufactured from an expandable heat-sensitive material; and expanding stainless steel stents formed of stainless steel wire in a zig-zag pattern. In general, the foregoing structures have one major disadvantage in common. Insofar as these structures must be delivered to the desired location within a given body passageway in a collapsed state, in order to pass through the body passageway, there is no effective control over the final, expanded configuration of each structure. For example, the expansion of a particular coiled spring-type graft is predetermined by the spring constant and modulus of elasticity of the particular material utilized to manufacture the coiled spring structure. These same factors predetermine the amount of expansion of collapsed stents formed of stainless steel wire in a zig-zag pattern. In the case of intraluminal grafts, or prostheses, formed of a heat sensitive material which expands upon heating, the amount of expansion is likewise predetermined by the heat expansion characteristics of the particular alloy utilized in the manufacture of the intraluminal graft.

Thus, once the foregoing types of intraluminal grafts are expanded at the desired location within a body passageway, such as within an artery or vein, the expanded size of the graft cannot be changed. If the diameter of the desired body passageway has been miscalculated, an undersized graft might not expand enough to contact the interior surface of the body passageway, so as to be secured thereto. It may then migrate away from the desired location within the body passageway. Likewise, an oversized graft might expand to such an extent that the spring force, or expansion force, exerted by the graft upon the body passageway could cause rupturing of the body passageway.

Another alternative to conventional vascular surgery has been percutaneous balloon dilation of elastic vascular stenoses, or blockages, through use of a catheter mounted angioplasty balloon. In this procedure, the angioplasty balloon is inflated within the stenosed vessel, or body passageway, in order to shear and disrupt the wall components of the vessel to obtain an enlarged lumen. With respect to arterial atherosclerotic lesions, the relatively incompressible plaque remains unaltered, while the more elastic medial and adventitial layers of the body passageway stretch around the plaque. This process produces dissection, or a splitting and tearing, of the body passageway wall layers, wherein the intima, or internal surface of the artery or body passageway, suffers fissuring. This dissection forms a "flap" of underlying tissue which may reduce the blood flow through the lumen, or block the lumen. Typically, the distending intraluminal pressure within the body passageway can hold the disrupted layer or flap, in place. If the intimal flap created by the balloon dilation procedure is not maintained in place against the expanded intima, the intimal flap can fold down into the lumen and close off the lumen, or may even become detached and enter the body passageway. When the intimal flap closes off the body passageway, immediate surgery is necessary to correct this problem.

Although the balloon dilation procedure is typically conducted in the catheterization lab of a hospital, because of the foregoing problem, it is always necessary to have a surgeon on call should the intimal flap block the blood vessel or body passageway. Further, because of the possibility of the intimal flap tearing away from the blood vessel and blocking the lumen, balloon dilations cannot be performed upon certain critical body passageways, such as the left main coronary artery, which leads into the heart. If an intimal flap formed by a balloon

dilation procedure abruptly comes down and closes off a critical body passageway, such as the left main coronary artery, the patient could die before any surgical procedures could be performed.

Additional disadvantages associated with balloon dilation of elastic vascular stenoses is that many fail because of elastic recoil of the stenotic lesion. This usually occurs due to a high fibrocollagenous content in the lesion and is sometimes due to certain mechanical characteristics of the area to be dilated. Thus, although the body passageway may initially be successfully expanded by a balloon dilation procedure, subsequent, early restenosis can occur due to the recoil of the body passageway wall which decreases the size of the previously expanded lumen of the body passageway. For example, stenoses of the renal artery at the ostium are known to be refractory to balloon dilation because the dilating forces are applied to the aortic wall rather than to the renal artery itself. Vascular stenoses caused by neointimal fibrosis, such as those seen in dialysis-access fistulas, have proved to be difficult to dilate, requiring high dilating pressures and larger balloon diameters. Similar difficulties have been observed in angioplasties of graft-artery anastomotic strictures and postendarterectomy recurrent stenoses. Percutaneous angioplasty of Takayasu arteritis and neurofibromatosis arterial stenoses may show poor initial response and recurrence which is believed due to the fibrotic nature of these lesions.

Accordingly, prior to the development of the present invention, there has been no expandable intraluminal vascular graft, and method and apparatus for expanding the lumen of a body passageway, which: prevents recurrence of stenoses in the body passageway; can be utilized for critical body passageways, such as the left main coronary artery of a patient's heart; prevents recoil of the body passageway wall; and allows the intraluminal graft to be expanded to a variable size to prevent migration of the graft away from the desired location; and to prevent rupturing of the body passageway by the expanded graft. Therefore, the art has sought an expandable intraluminal vascular graft, and method and apparatus for expanding the lumen of a body passageway which: prevents recurrence of stenoses in the body passageway; is believed to be able to be utilized in critical body passageways, such as the left main coronary artery of the heart; prevents recoil of the body passageway; and can be expanded to a variable size within the body passageway to prevent migration of the graft away from the desired location; and to prevent rupturing of the body passageway by the expanded graft.

## SUMMARY OF THE INVENTION

In accordance with the invention the foregoing advantages have been achieved through the present expandable intraluminal vascular graft. The present invention includes a tubular shaped member having first and second ends and a wall surface disposed between the first and second ends, the wall surface being formed by a plurality of intersecting elongate members, at least some of the elongate members intersecting with one another intermediate the first and second ends of the tubular shaped member; the tubular shaped member having a first diameter which permits intraluminal delivery of the tubular shaped member into a body passageway having a lumen; and the tubular shaped member having a second, expanded diameter, upon the application from the interior of the tubular shaped member of a radially, outwardly extending force, which second diameter is variable and dependent upon the amount of force applied to the tubular shaped member, whereby the tubular shaped member may be expanded to expand the lumen of the body passageway.

A further feature of the present invention is that the plurality of elongate members may be a plurality of wires, and the wires may be fixedly secured to one another where the wires intersect with one another. An additional feature of the present invention is that the plurality of elongate members may be a plurality of thin bars which are fixedly secured to one another where the bars intersect with one another. A further feature of the present invention is that the tubular shaped member may have a biological inter coating on its wall surface, and the coating may include a means for anchoring the tubular shaped member to the body passageway.

In accordance with the invention, the foregoing advantages have also been achieved through the present method for expanding the lumen of a body passageway. The method of the present invention comprises the steps of: inserting an intraluminal graft, disposed upon a catheter, into the body passageway until it is disposed adjacent a desired location within the body passageway; and expanding a portion of the catheter to cause the intraluminal graft to radially expand outwardly into contact with the body passageway until the lumen of the body passageway at the desired location of the body passageway has been expanded, whereby the intraluminal graft prevents the body passageway from collapsing and decreasing the size of the expanded lumen.

A further feature of the present invention is that the portion of the catheter in contact with the intraluminal graft may be collapsed, and the catheter removed from the body passageway. A further feature of the present invention is that a catheter

having an expandable, inflatable portion associated therewith may be utilized; and expansion of the intraluminal graft and the portion of the catheter is accomplished by inflating the expandable, inflatable portion of the catheter.

A further feature of the present invention is that a wire mesh tube may be utilized as the intraluminal graft, the wire mesh tube having a first predetermined, collapsed diameter which permits the tube to be inserted within the body passageway at and delivered to the desired location. Another feature of the present invention is that the wire mesh tube may be expanded to a second diameter within the body passageway; the second, expanded diameter being variable and determined by the desired expanded internal diameter of the body passageway, whereby the expanded wire mesh tube will not migrate from the desired location within the body passageway and the expansion of the intraluminal graft does not cause a rupture of the body passageway.

In accordance with the invention, the foregoing advantages have also been achieved through the present apparatus for intraluminally reinforcing a body passageway. The present invention includes: an expandable, tubular shaped prosthesis having first and second ends and a wall surface disposed between the first and second ends, the wall surface being formed by a plurality of intersecting elongate members; and a catheter, having an expandable, inflatable portion associated therewith and including means for mounting and retaining the expandable tubular shaped prosthesis on the expandable, inflatable portion, whereby upon inflation of the expandable, inflatable portion of the catheter, the prosthesis is forced radially outwardly into contact with the body passageway. A further feature of the present invention is that the mounting and retaining means may comprise a retainer ring member disposed on the catheter adjacent the expandable, inflatable portion and adjacent each end of the expandable, tubular shaped prosthesis.

The expandable intraluminal vascular graft, method for expanding the lumen of a body passageway, and apparatus for intraluminally reinforcing a body passageway of the present invention, when compared with previously proposed prior art intraluminal grafts, methods for implanting them, and balloon dilation techniques have the advantage of: preventing recurrence of stenoses; is believed to permit implantation of grafts in critical body passageways, such as in the left main coronary artery of the heart; prevents recoil of the body passageway; and permits expansion of the graft to a variable size dependent upon conditions within the body passageway.

## BRIEF DESCRIPTION OF THE DRAWINGS:

In the drawings:

FIG. 1A is a perspective view of an expandable intraluminal vascular graft, or prosthesis for a body passageway, having a first diameter which permits delivery of the graft, or prosthesis, into a body passageway;

FIG. 1B is a perspective view of the graft, or prosthesis, of FIG. 1A, in its expanded configuration when disposed within a body passageway;

FIG. 2A is a perspective view of another embodiment of an expandable intraluminal vascular graft, or prosthesis for a body passageway, having a first diameter which permits intraluminal delivery of the graft, or prosthesis, into a body passageway; and

FIG. 2B is a perspective view of the graft, or prosthesis, of FIG. 2A, shown in its expanded configuration when disposed within a body passageway.

While the invention will be described in connection with the preferred embodiment, it will be understood that it is not intended to limit the invention to that embodiment. On the contrary, it is intended to cover all alternatives, modifications, and equivalents, as may be included within the spirit and scope of the invention as defined by the appended claims.

## DETAILED DESCRIPTION OF THE INVENTION:

In FIGS. 1A and 2A, an expandable intraluminal vascular graft, or expandable prosthesis for a body passageway, 70 is illustrated. It should be understood that the terms "expandable intraluminal vascular graft" and "expandable prosthesis" are interchangeably used to some extent in describing the present invention, insofar as the methods, apparatus, and structures of the present invention may be utilized not only in connection with an expandable intraluminal vascular graft for expanding partially occluded segments of a blood vessel, or body passageway, but may also be utilized for many other purposes as an expandable prosthesis for many other types of body passageways. For example, expandable prostheses 70 may also be used for such purposes as: (1) supportive graft placement within blocked arteries opened by transluminal recanalization, but which are likely to collapse in the absence of an internal support; (2) similar use following catheter passage through mediastinal and other veins occluded by inoperable cancers; (3) reinforcement of catheter created intrahepatic communications between portal and hepatic veins in patients suffering from portal hypertension; (4) supportive graft placement of nar-

rowing of the esophagus, the intestine, the ureters, the urethra; and (5) supportive graft reinforcement of reopened and previously obstructed bile ducts. Accordingly, use and the term "prosthesis" encompasses the foregoing usages within various types of body passageways, and the use of the term "intraluminal vascular graft" encompasses use for expanding the lumen of a body passageway. Further, in this regard, the term "body passageway" encompasses any duct within the human body, such as those previously described, as well as any vein, artery, or blood vessel within the human vascular system.

Still with reference to FIG. 1A, the expandable intraluminal vascular graft, or prosthesis, 70 is shown to generally comprise a tubular shaped member 71 having first and second ends 72, 73 and a wall surface 74 disposed between the first and second ends 72, 73. Preferably, the wall surface 74 is formed by a plurality of intersecting elongate members 75, 76 with at least some of the elongate members 75, 76 intersecting with one another intermediate the first and second ends 72, 73 of the tubular shaped member 71, such as shown at intersection points 77. Tubular shaped member 71 has a first diameter,  $d$ , which, to be hereinafter described in greater detail, permits intraluminal delivery of the tubular shaped member 71 into a body passageway 80 having a lumen 81. With reference to FIG. 1B, upon the application from the interior of the tubular shaped member 71 of a radially, outwardly extending force, to be hereinafter described in greater detail tubular shaped member 71 has a second, expanded diameter,  $d'$ , which second diameter  $d'$  is variable in size and dependent upon the amount of force applied to the tubular shaped member 71.

With reference to FIGS. 1A and 1B, elongate members 75, 76, which form wall surface 74 of tubular shaped member 71, may be any suitable material which is compatible with the human body and the bodily fluids (not shown) with which the vascular graft, or prosthesis, 70 may come into contact. Elongate members 75, 76 must also be made of a material which has the requisite strength and elasticity characteristics to permit the tubular shaped member 71 to be expanded from the configuration shown in FIG. 1A to the configuration shown illustrated in FIG. 1B and further to permit the tubular shaped member 71 to retain its expanded configuration with the enlarged diameter  $d'$  shown in FIG. 1B. Suitable materials for the fabrication of tubular shaped member 71 would include silver, tantalum, stainless steel, gold, titanium or any suitable plastic material having the requisite characteristics previously described. Preferably, elongate members 75, 76 are fabricated from stainless steel. Preferably, the elongate members 75, 76

illustrated in FIGS. 1A and 1B are small diameter stainless steel wires having a cylindrical cross-section. It should of course be understood that each elongate member 75, 76, could have other cross-sectional configurations, such as triangular, square, rectangular, hexagonal, etc. Further, it is preferable that the plurality of elongate members 75, 76 are fixedly secured to one another where the elongate members 75, 76 intersect with one another, such as at the intersection points 77. Elongate members 75, 76 could be fixedly secured to one another in any conventional manner, such as by welding, soldering, or gluing, such as with a suitable epoxy glue; however, it is preferred that the intersection points 77 are soldered with silver. By fixedly securing the elongate members 75, 76, to one another, tubular member 71 is provided with a relatively high resistance to radial collapse, and the tubular shaped member 71 has the ability to retain its enlarged diameter,  $d'$ , as shown in FIG. 1B. Preferably, tubular shaped member 71 is made of continuous, stainless steel wire woven in a criss-crossed tubular pattern to form what can be generally described as a wire mesh tube.

When fabricating tubular shaped member, or wire mesh tube, 71, it can be initially fabricated in the configuration shown in FIG. 1A with diameter,  $d$ . Alternatively, it can be fabricated with a diameter which is larger than initial diameter  $d$  and after fabrication, tubular shaped member 71 could be carefully collapsed to have diameter  $d$  shown in FIG. 1A. During the collapsing of tubular shaped member, or wire mesh tube, 71, care must be taken to insure that overlapping of adjacent elongate member 75, 76 is avoided. It should of course be understood that upon expansion of tubular shaped member, or wire mesh tube, 71 into the configuration shown in FIG. 1B, the distance between first and second ends 72 and 73 will of course decrease.

With reference now to FIGS. 2A and 2B, another embodiment of expandable intraluminal vascular graft, or prosthesis, 70, is illustrated. The same reference numerals are utilized and are applicable for elements previously described in FIGS. 1A and 1B. The intraluminal vascular graft, or prosthesis, 70 of FIGS. 2A and 2B differs from that previously described in connection with FIGS. 1A and 1B, in that the plurality of elongate members 75 and 76 are a plurality of thin bars 78, 79 which are preferably fixedly secured to one another where the bars 78, 79 intersect with one another. Bars 78, 79 preferably have a thin, rectangular cross-sectional configuration, and may be joined to one another in any conventional manner, such as by welding, brazing, soldering, or may be formed integral with one another. Preferably, tubular shaped member 71 is initially a thin-walled stain-

less steel tube, and the openings 82 between the intersecting bars 78 and 79 are formed by a conventional etching process, such as electromechanical or laser etching, whereby the resultant structure is a tubular shaped member 71 having a plurality of intersecting elongate members 78, 79. The embodiment of graft, or prosthesis, 70 of FIG. 2A, likewise can assume an expanded configuration as shown in FIG. 2B and as previously described in connection with FIG. 1B, upon the application from the interior of the tubular shaped member 71 of a radially, outwardly extending force. It should be further understood that the embodiment of vascular graft, or prosthesis, 70 of FIGS. 2A and 2B, could also be generally described as a wire mesh tube.

The methods and apparatus of the present invention will be described in greater detail. Once again, it should be understood that the methods and apparatus of the present invention are useful not only for expanding the lumen of a body passageway, such as an artery, vein, or blood vessel of the human vascular system, but are also useful to perform the previously described procedures to intraluminally reinforce other body passageways or ducts, as previously described. An expandable intraluminal vascular graft, or prosthesis, 70, which may be of the type previously described in connection with FIGS. 1A or 2A, is disposed or mounted upon a catheter 83. Catheter 83 has an expandable, inflatable portion 84 associated therewith. Catheter 83 includes means for mounting and retaining 85 the expandable intraluminal vascular graft, or prosthesis, 70 on the expandable, inflatable portion 84 of catheter 83. Preferably, the mounting and retaining means 85 comprises retainer ring members 86 disposed on the catheter 83 adjacent the expandable inflatable portion 84 of catheter 83; and a retainer ring member 86 is disposed adjacent each end 72, 73 of the expandable intraluminal vascular graft, or prosthesis, 70. Preferably, while retainer ring members are formed integral with catheter 83, and the retainer ring member 86 adjacent the leading tip 87 of catheter 83 slopes upwardly and away from catheter tip 87 in order to protect and retain graft or prosthesis, 70 as it is inserted into the lumen 81 of body passageway 80, as to be hereinafter described in greater detail. The remaining retainer ring member 86 slopes downwardly away from tip 87 of catheter 83, to insure easy removal of catheter 83 from body passageway 80. After expandable intraluminal graft, or prosthesis, 70 has been disposed upon catheter 83, in the manner previously described, the graft, or prosthesis, 70 and catheter 83 are inserted within a body passageway 80 by catheterization of the body passageway 80 in a conventional manner.

In a conventional manner, the catheter 83 and graft, or prosthesis, 70 are delivered to the desired location within the body passageway 80, whereat it is desired to expand the lumen 81 of body passageway 80 via intraluminal graft 70, or where it is desired to implant prosthesis 70. Fluoroscopy, and/or other conventional techniques may be utilized to insure that the catheter 83 and graft, or prosthesis, 70 are delivered to the desired location within the body passageway. Prosthesis, or graft, 70 are then expanded by expanding the expandable, inflatable portion 84 of catheter 83, whereby the prosthesis, or graft, 70 is forced radially, outwardly into contact with the body passageway 80. In this regard, the expandable, inflatable portion of catheter 83 may be a conventional angioplasty balloon 88. After the desired expansion of prosthesis, or graft, 70 has been accomplished, angioplasty balloon 88 may be collapsed, or deflated, and the catheter 83 may be removed in a conventional manner from body passageway 80. If desired, catheter 83, having graft or prosthesis, 70 disposed thereon, may be initially encased in a conventional Teflon<sup>TM</sup> sheath 89, which is pulled away from prosthesis, or graft, 70, prior to expansion of the prosthesis, or graft, 70.

It should be noted that the tubular shaped member 71 of prosthesis, or graft, 70 initially has the first predetermined, collapsed diameter  $d$  as described in connection with FIGS. 1A and 2A, in order to permit the insertion of the wire mesh tube, or tubular shaped member, 71 into the body passageway 80 as previously described. When it is desired to implant prosthesis 70 within a body passageway 80 for the purposes previously described, the wire mesh tube, or prosthesis 70, is expanded to the second diameter  $d'$  and the second, expanded diameter  $d'$  is variable and determined by the internal diameter of the body passageway 80. Accordingly, the expanded prosthesis 70, upon deflation of angioplasty balloon 88 will not be able to migrate from the desired location within the body passageway 80, nor will the expansion of the prosthesis 70 be likely to cause a rupture of the body passageway 80.

When it is desired to use expandable intraluminal graft 70 to expand the lumen 81 of a body passageway 80 having an area of stenosis, the expansion of intraluminal vascular graft 70 by angioplasty balloon 88, allows controlled dilation of the stenotic area and, at the same time controlled expansion of the vascular graft 70, whereby vascular graft 70 prevents the body passageway 80 from collapsing and decreasing the size of the previously expanded lumen 81. Once again, the second, expanded diameter  $d'$  of intraluminal vascular graft 70, is variable and determined by the desired expanded internal diameter of body passageway



80. Thus, the expandable intraluminal graft 70 will not migrate away from the desired location within the body passageway 80 upon deflation of angioplasty balloon 88, nor will the expansion of intraluminal graft 70 likely cause a rupture of body passageway 80. Further, should an intimal flap, or fissure, be formed in body passageway 80 at the location of graft 70, graft 70 will insure that such an intimal flap will not be able to fold inwardly into body passageway 80, nor tear loose and flow through body passageway 80. In the situation of utilizing graft 70 in the manner previously described to expand the lumen of a portion of the left main artery, it is believed that the intimal flap will be unable to enter the heart and cause the death of the patient.

Because it is only necessary to inflate angioplasty balloon 88 one time in order to expand graft 70, it is believed that a greater amount of endothelium, or inner layer of the intima, or inner surface of the body passageway, will be preserved, insofar as the extent of endothelial denudation during transluminal angioplasty is proportional to the balloon inflation time. Further, in theory, the amount of preserved endothelium should be large because in the expanded configuration of graft 70, potentially 80% of the endothelium is exposed through openings 82 of graft 70. It is further believed that intact patches of endothelium between the elongate members 75, 76, 78, 79 of graft 70 may result in a rapid, multicentric endothelialization pattern as shown by experimental studies.

It is to be understood that the invention is not limited to the exact details of construction, operation, exact materials or embodiment shown and described, as obviously modifications and equivalents will be apparent to one skilled in the art. For example, the means for expanding the prosthesis or graft could be a plurality of hydraulically actuated rigid members disposed on a catheter, or a plurality of angioplasty balloons could be utilized to expand the prosthesis or graft. Accordingly, the invention is therefore to be limited only by the scope of the appended claims.

## Claims

1. An expandable intraluminal vascular graft, comprising:  
a tubular shaped member having first and second ends and a wall surface disposed between the first and second ends, the wall surface being formed by a plurality of intersecting elongate members, at least some of the elongate members intersecting with one another intermediate the first and second ends of the tubular shaped members;  
the intersecting elongate members being a plurality

of thin bars, each bar having a uniform thin rectangular cross-sectional configuration;  
the tubular shaped member having a first diameter which permits intraluminal delivery of the tubular shaped member into a body passageway having a lumen; and

the tubular shaped member having a second, expanded diameter, upon the application from the interior of the tubular shaped member of a radially, outwardly extending force, which second diameter is variable and dependent upon the amount of force applied to the tubular shaped member, whereby the tubular shaped member may be expanded to expand the lumen of the body passageway.

2. The expandable intraluminal vascular graft of claim 1, wherein the plurality of thin bars are fixedly secured to one another where the bars intersect with one another.

3. An expandable prosthesis for a body passageway, comprising:

a tubular shaped member having first and second ends and a wall surface disposed between the first and second ends, the wall surface being formed by a plurality of intersecting elongate members, at least some of the elongate members intersecting with one another intermediate the first and second ends of the tubular shaped member;

the intersecting elongate members being a plurality of thin bars, each bar having a uniform, thin rectangular cross-sectional configuration;

the tubular shaped member having a first diameter which permits intraluminal delivery of the tubular shaped member into a body passageway having a lumen; and

the tubular shaped member having a second, expanded diameter, upon the application from the interior of the tubular shaped member of radially, outwardly extending force, which second diameter is variable and dependent upon the amount of force applied to the tubular shaped member, whereby the tubular shaped member may be expanded to expand the lumen of the body passageway.

4. The expandable prosthesis for a body passageway of claim 3, wherein the plurality of thin bars are fixedly secured to one another where the bars intersect with one another.

5. An apparatus for intraluminally reinforcing a body passageway, comprising:

an expandable, tubular shaped prosthesis having first and second ends, and a wall surface disposed between the first and second ends, the wall surface being formed by a plurality of intersecting elongate members, the intersecting elongate members being a plurality of thin bars, each bar having a uniform, thin rectangular cross-sectional configuration; and  
a catheter, having an expandable, inflatable portion

associated therewith and including means for mounting and retaining the expandable, tubular shaped prosthesis on the expandable, inflatable portion.

whereby upon inflation of the expandable, inflatable portion of the catheter, the prosthesis is forced radially outwardly into contact with the body passageway.

6. The apparatus of claim 5, wherein the mounting and retaining means comprises retainer ring members disposed on the catheter adjacent the expandable, inflatable portion and adjacent each end of the expandable, tubular shaped prosthesis.

7. An apparatus for expanding the lumen of a body passageway comprising:  
an expandable intraluminal vascular graft having first and second ends, and a wall surface disposed between the first and second ends, the wall surface

being formed by a plurality of intersecting elongate members, the intersecting elongate members being a plurality of thin bars, each bar having a uniform, thin rectangular cross-sectional configuration; and a catheter, having an expandable, inflatable portion associated therewith and including means for mounting and retaining the expandable intraluminal vascular graft on the expandable, inflatable portion, whereby upon inflation of the expandable, inflatable portion of the catheter, the intraluminal vascular graft is forced radially outwardly into contact with the body passageway.

8. The apparatus of claim 7, wherein the mounting and retaining means comprises retainer ring members disposed on the catheter adjacent the expandable, inflatable portion and adjacent each end of the expandable intraluminal vascular graft.

20

25

30

35





40

45

50

55

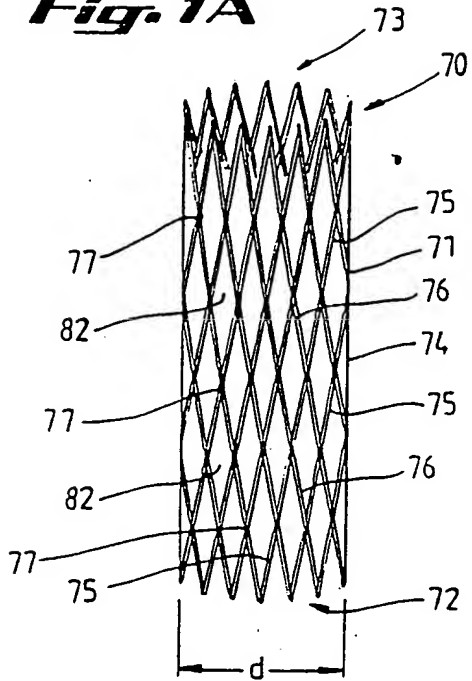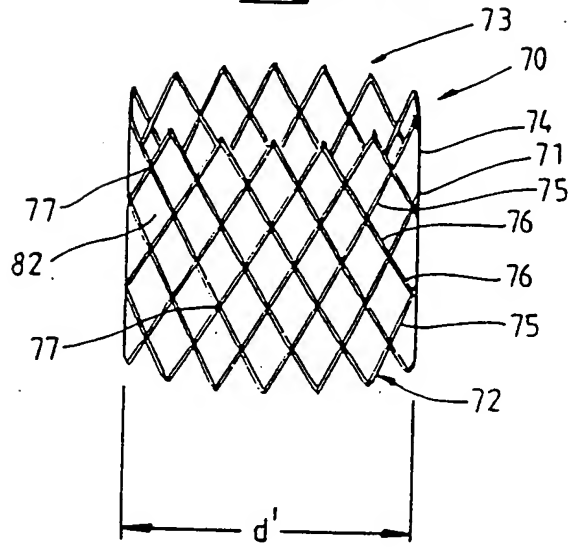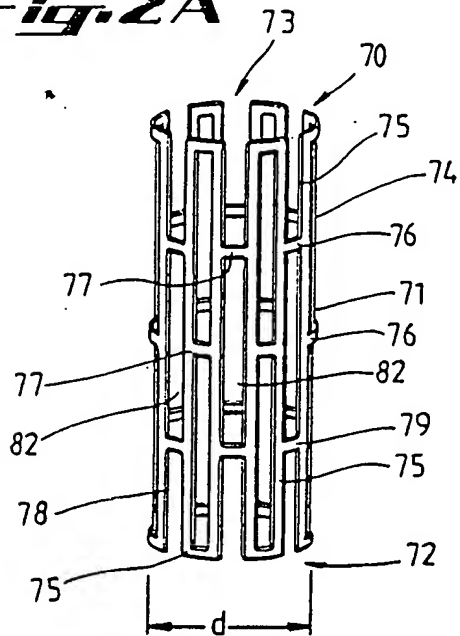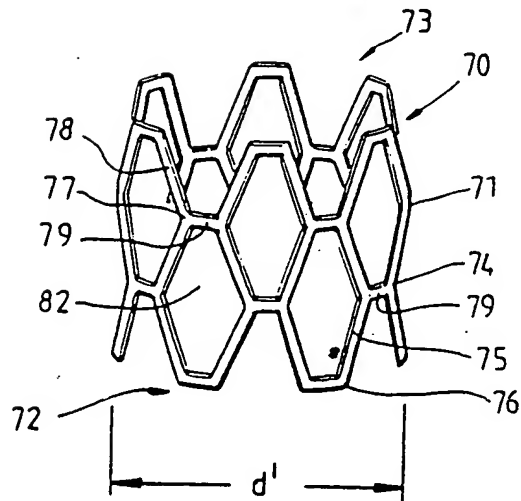

**Fig. 1A****Fig. 1B****Fig. 2A****Fig. 2B**



⑪ Publication number: **0 221 570 B1**

⑫

## EUROPEAN PATENT SPECIFICATION

④⑤ Date of publication of patent specification :  
**30.01.91 Bulletin 91/05**

⑤① Int. Cl.<sup>6</sup> : **A61F 2/04**

②① Application number : **86115473.0**

②② Date of filing : **07.11.86**

⑤④ Expandable intraluminal graft, and apparatus for implanting an expandable intraluminal graft.

③③ Priority : **07.11.85 US 796009**

④③ Date of publication of application :  
**13.05.87 Bulletin 87/20**

④⑤ Publication of the grant of the patent :  
**30.01.91 Bulletin 91/05**

⑥④ Designated Contracting States :  
**AT BE CH DE ES FR GB GR IT LI LU NL SE**

⑤⑥ References cited :  
**WO-A-83/03752**  
**US-A- 3 857 744**  
**US-A- 4 553 545**  
**US-A- 4 580 568**

⑦③ Proprietor : **Palmaz, Julio C.**  
**12610 Stonehenge**  
**San Antonio Texas 78230 (US)**

⑦② Inventor : **Palmaz, Julio C.**  
**12610 Stonehenge**  
**San Antonio Texas 78230 (US)**

⑦④ Representative : **Patentanwälte Grünecker,**  
**Kinkeldey, Stockmair & Partner**  
**Maximilianstrasse 58**  
**D-8000 München 22 (DE)**

**EP 0 221 570 B1**

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

cessfully expanded by a balloon dilation procedure, subsequent, early restenosis can occur due to the recoil of the body passageway wall which decreases the size of the previously expanded lumen of the body passageway. For example, stenoses of the renal artery at the ostium are known to be refractory to balloon dilation because the dilating forces are applied to the aortic wall rather than to the renal artery itself. Vascular stenoses caused by neointimal fibrosis, such as those seen in dialysis-access fistulas, have proved to be difficult to dilate, requiring high dilating pressures and larger balloon diameters. Similar difficulties have been observed in angioplasties of graft-artery anastomotic strictures and postendarterectomy recurrent stenoses. Percutaneous angioplasty of Takayasu arteritis and neurofibromatosis arterial stenoses may show poor initial response and recurrence which is believed due to the fibrotic nature of these lesions.

Therefore it is an object of the invention to provide a graft or prosthesis as mentioned in the preamble of claim 1 and an associated apparatus which can be inserted by a controlled expansion so as to be fitted properly into the body passageway.

This object is solved by the features of the characterising parts of claims 1 and 4.

In accordance with the invention the foregoing advantages have been achieved through the present expandable intraluminal vascular graft. The present invention includes a tubular shaped member having first and second ends and a wall surface disposed between the first and second ends, the wall surface being formed by a plurality of intersecting elongate members, at least some of the elongate members intersecting with one another intermediate the first and second ends of the tubular shaped member; the tubular shaped member having a first diameter which permits intraluminal delivery of the tubular shaped member into a body passageway having a lumen; and the tubular shaped member having a second, expanded diameter, upon the application from the interior of the tubular shaped member of a radially, outwardly extending force, which second diameter is variable and dependent upon the amount of force applied to the tubular shaped member, whereby the tubular shaped member may be expanded to expand the lumen of the body passageway.

Accordingly, prior to the development of the present invention, there has been no expandable intraluminal vascular graft, and method and apparatus for expanding the lumen of a body passageway, which : prevents recurrence of stenoses in the body passageway ; can be utilized for critical body passageways, such as the left main coronary artery of a patient's heart ; prevents recoil of the body passageway wall ; and allows the intraluminal graft to be expanded to a variable size to prevent migration of the graft away from the desired location ; and to prevent

rupturing of the body passageway by the expanded graft. Therefore, the art has sought an expandable intraluminal vascular graft, and method and apparatus for expanding the lumen of a body passageway which : prevents recurrence of stenoses in the body passageway ; is believed to be able to be utilized in critical body passageways, such as the left main coronary artery of the heart ; prevents recoil of the body passageway ; and can be expanded to a variable size within the body passageway to prevent migration of the graft away from the desired location ; and to prevent rupturing of the body passageway by the expanded graft.

A further feature of the present invention is that the plurality of elongate members may be a plurality of wires, and the wires may be fixedly secured to one another where the wires intersect with one another. An additional feature of the present invention is that the plurality of elongate members may be a plurality of thin bars which are fixedly secured to one another where the bars intersect with one another. A further feature of the present invention is that the tubular shaped member may have a biological inert coating on its wall surface, and the coating may include a means for anchoring the tubular shaped member to the body passageway.

In accordance with the invention, the foregoing advantages have also been achieved through the present method for expanding the lumen of a body passageway.

The method of the present invention comprises the steps of : inserting an intraluminal graft, disposed upon a catheter, into the body passageway until it is disposed adjacent a desired location within the body passageway ; and expanding a portion of the catheter to cause the intraluminal graft to radially expand outwardly into contact with the body passageway until the lumen of the body passageway at the desired location of the body passageway has been expanded, whereby the intraluminal graft prevents the body passageway from collapsing and decreasing the size of the expanded lumen.

A further feature of the present invention is that the portion of the catheter in contact with the intraluminal graft may be collapsed, and the catheter removed from the body passageway. A further feature of the present invention is that a catheter having an expandable, inflatable portion associated therewith may be utilized ; and expansion of the intraluminal graft and the portion of the catheter is accomplished by inflating the expandable, inflatable portion of the catheter.

A further feature of the present invention is that a wire mesh tube may be utilized as the intraluminal graft, the wire mesh tube having a first predetermined, collapsed diameter which permits the tube to be inserted within the body passageway at and delivered to the desired location. Another feature of the present invention is that the wire mesh tube may be expanded

as obviously modifications and equivalents will be apparent to one skilled in the art. For example, the means for expanding the prosthesis or graft could be a plurality of hydraulically actuated rigid members disposed on a catheter, or a plurality of angioplasty balloons could be utilized to expand the prosthesis or graft. Accordingly, the invention is therefore to be limited only by the scope of the appended claims.

## Claims

1. An expandable intraluminal vascular graft or prosthesis (70) for a body passageway, comprising : a tubular shaped member (71) having first (72) and second (73) ends and a wall surface (74) disposed between the first and second ends, the wall surface (74) being formed by a plurality of intersecting elongate members (75, 76), at least some of the elongate members (75, 76) intersecting with one another intermediate the first and the second ends of the tubular shaped members (71), the tubular shaped member (71) having a first diameter (d) which permits intraluminal delivery of the tubular shaped member into a body passageway having a lumen; and the tubular shaped member (71) having a second expanded diameter (d'), characterized in that the intersecting elongate members (75, 76) are a plurality of thin bars, each having a uniform thin rectangular cross-sectional configuration, and that the second expanded diameter (d') is determined by the application from the interior of the tubular shaped member (71) of a radially, outwardly extending force, which second diameter (d') is variable and controlled by the amount of force applied to the tubular shaped member (71), at least some of the elongate members (75, 76) being deformed by the radially, outwardly extending force, to retain the tubular shaped member (71) with the second expanded diameter (d'), whereby the tubular shaped member (71) may be expanded to expand the lumen of the body passageway and remain therein.

2. The graft or prosthesis of claim 1, wherein the plurality of elongate members (75, 76) are fixedly secured to one another where the bars intersect with one another.

3. The graft or prosthesis of claim 1 or 2, wherein the material of said elongated members (75, 76) comprises tantalum as a main component.

4. An apparatus for intraluminally reinforcing or expanding the lumen of a body passageway, comprising an expandable, tubular shaped prosthesis or intraluminal vascular graft (70) having first and second ends (72, 73), and a wall surface (74) disposed between the first and second ends, the wall surface being formed by a plurality of intersecting, elongate members (75, 76) and a catheter for mounting the prosthesis or graft (70), especially to one of claims 1

to 3, characterized in that

the catheter has an expandable, inflatable portion associated therewith and including means for mounting and retaining the expandable, tubular shaped prosthesis or intraluminal vascular graft (70) on the expandable, inflatable portion, whereby upon inflation of the expandable, inflatable portion of the catheter, the prosthesis (70) is forced radially outwardly into contact with the body passageway to remain therein, and the expansion of the prosthesis (70) is controlled by the expansion of the inflatable portion of the catheter.


5. The apparatus of claim 4, wherein the mounting and retaining means comprises retainer ring members disposed on the catheter adjacent the expandable, inflatable portion and adjacent each end of the expandable, tubular shaped prosthesis.

## Ansprüche


1. Aufweitbares, intraluminales, vaskuläres Gewebe bzw. Prothese (70) für einen Körperdurchgang, umfassend : ein rohrförmiges Element (71) mit einem ersten Ende (72) und einem zweiten Ende (73) und einer zwischen dem ersten und dem zweiten Ende angeordneten Wandfläche (74), die aus einer Vielzahl von sich kreuzenden langgestreckten Gliedern (75, 76) gebildet ist, von denen zumindest einige sich zwischen dem ersten und dem zweiten Ende des rohrförmigen Elementes (71) kreuzen, wobei das rohrförmige Element (71) einen ersten Durchmesser (d) aufweist, welcher die intraluminale Einführung des rohrförmigen Elementes in einen ein Lumen aufweisenden Körperdurchgang erlaubt, und wobei das rohrförmige Element (71) ferner einen zweiten, aufgeweiteten Durchmesser (d') aufweist, dadurch gekennzeichnet, daß die sich kreuzenden langgestreckten Glieder (75, 76) eine Vielzahl dünner Stangen sind, von denen jede eine gleichmäßige dünne und einen rechteckigen Querschnitt aufweisende Konfiguration besitzt, und daß der zweite, erweiterte Durchmesser (d') bestimmt ist durch die Anwendung einer vom Inneren des rohrförmigen Elementes (71) radial nach außen wirkenden Kraft, welcher zweite Durchmesser (d') variabel ist und durch den Betrag der auf das rohrförmige Element (71) aufgebrachten Kraft kontrollierbar ist, wobei zumindest einige der langgestreckten Glieder (75, 76) durch die radial nach außen wirkende Kraft deformiert werden, um das rohrförmige Element (71) mit dem zweiten aufgeweiteten Durchmesser (d') zu halten, wodurch das rohrförmige Element (71) expandiert werden kann, um das Lumen des Körperdurchgangs aufzuweiten, und darin verbleiben kann.

2. Gewebe oder Prothese nach Anspruch 1, wobei die Vielzahl langgestreckter Glieder (75, 76) an den Stellen, an denen sich die Stangen miteinander


**Fig. 1A**

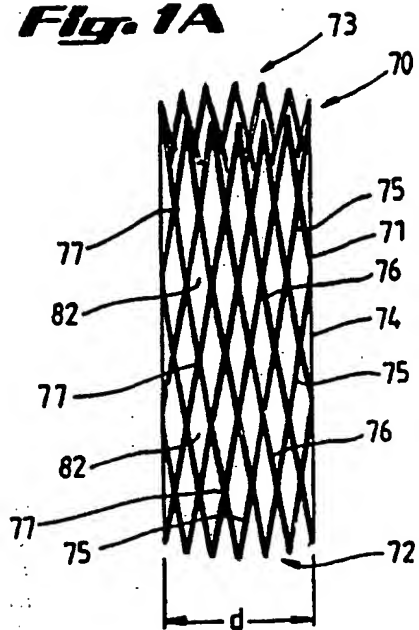


**Fig. 1B**

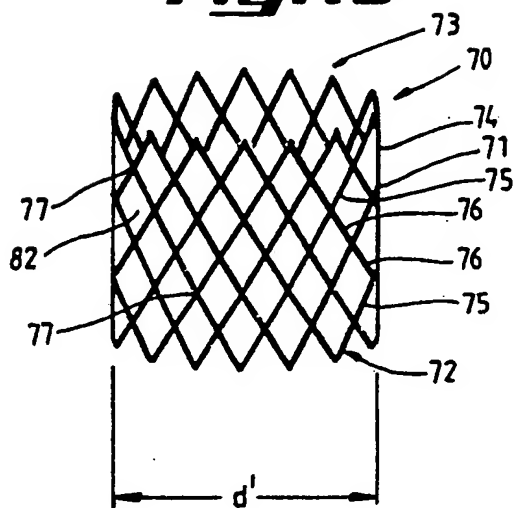

**Fig. 2A**

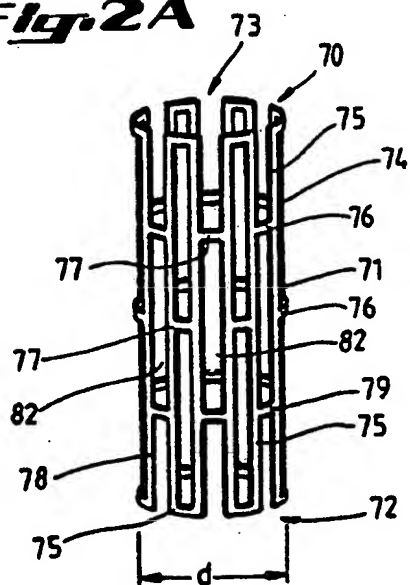

**Fig. 2B**

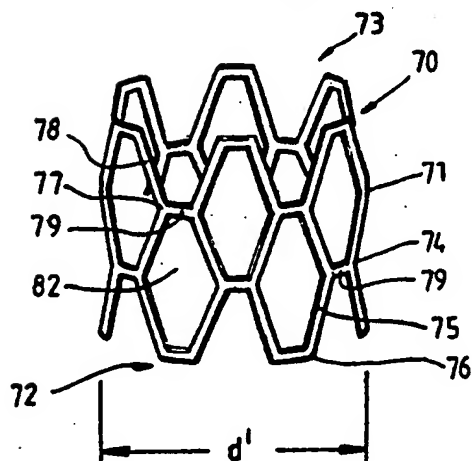

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**